


Sideshifting fork positioner

ZVP-S
ISO II/III

constant sideshift, bolt-on forks

The sideshifting fork positioner ZVP-S is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

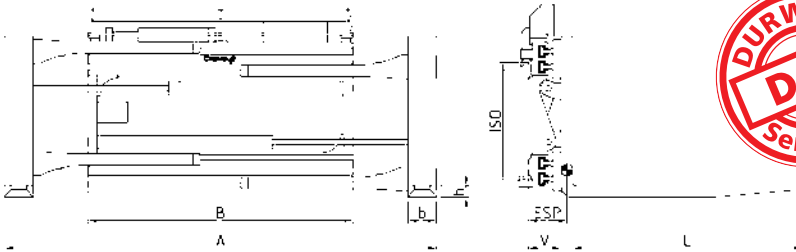

type	lift truck capacity tons	ISO	capacity kg/mm LC	A OTO mm	B mm	forks b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-S	1,0-1,5	II	1500/500	560-1710 560-1780	980 1050	100x40x1200	+/- 100	143	203 195	335 345
ZVP 25-S	2,0-2,5	II	2500/500	560-1710 560-1780 560-1810 560-1880 420-1600 560-1930 560-2130	980 1050 1080 1150 1150 1200 1400	125x45x1200	+/- 100	143	228 218 217 212 208 210 195	410 420 423 435 430 444 476
ZVP 30-S	3,0-3,2	III	3000/500	560-1730 560-1780 560-1880 440-1640 560-1930 560-2030 560-2080 560-2180	1000 1050 1150 1150 1200 1300 1350 1450	125x45x1200	+/- 100	143	217 213 210 212 209 202 200 195	427 435 450 446 458 472 480 497
ZVP 35-S	3,5	III	3500/500	560-1880 560-1980 560-2080	1150 1250 1350	140x50x1200	+/- 100	153	232 230 228	505 525 545
ZVP 40-S	4,0	III	4000/500	550-1960 550-2060 550-2160	1250 1350 1450	140x50x1200	+/- 100	155	207 203 198	642 660 678
ZVP 45-S	4,5-5,0/500	III	5000/500	550-1960 550-2060 550-2160 550-2260	1250 1350 1450 1550	150x60x1200	+/- 100	165	206 203 202 201	700 720 740 760
ZVP 48-S	5,0/600	III	4800/600	550-2060 550-2160 550-2260	1350 1450 1550	150x60x1200	+/- 100	175	195 193 190	790 800 810

- 2 hydraulic functions
- includes bolt-on forks
- features sideshift rollers

- for backrest see accessories
- includes protection strip
- no clamping allowed

DURWEN
Forklift Attachments

More than 60 years experience