


Sideshifting fork positioner

ZVP-S
ISO IV



constant sideshift, bolt-on forks

The sideshifting fork positioner **ZVP-S** is designed to allow fork spread beyond the width of the carriage. The attachment is equipped with constant sideshift and bolt-on forks as standard. No clamping of goods allowed.

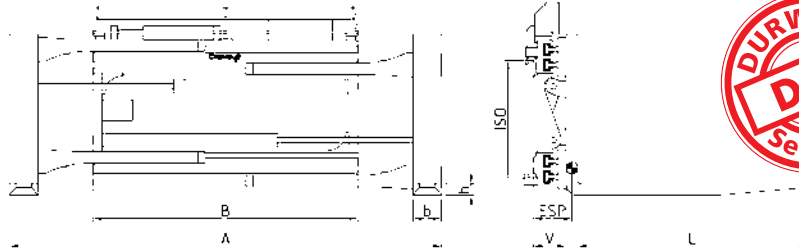

type	lift truck capacity tons	ISO	capacity kg/mm LC	A OTO mm	B mm	forks b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVP 50-S	5,0/600	IV	4800/600	550-2060	1350	150x60x1200	+/- 100	179	200	870
				550-2160	1450		+/- 100		205	880
				550-2260	1550		+/- 160		196	890
				550-2510	1800		+/- 160		190	945
ZVP 60-S	6,0	IV	6000/600	550-2160	1450	150x65x1200	+/- 100	179	225	890
				550-2510	1800		+/- 160		205	970
				550-2710	2000		+/- 160		200	1030
ZVP 80-S	7,0-8,0	IV	8000/600	560-2520	1800	200x70x1200	+/- 160	188	220	1450
				560-2720	2000				210	1520
				560-2920	2200				195	1590
ZVP 100-S	8,0/900	IV	8000/900	560-2650	2000	200x80x1200	+/- 160	198	215	1680
				560-2750	2100				210	1720
				560-2850	2200				205	1760
				560-3050	2400				195	1840
ZVP 110-S	8,0/1100	IV	8000/1100	560-2850	2200	200x80x1200	+/- 160	209	220	2090
				560-3050	2400				215	2220

- 2 hydraulic functions
- includes bolt-on forks
- features sideshift rollers
- for backrest see accessories
- includes protection strip
- no clamping allowed

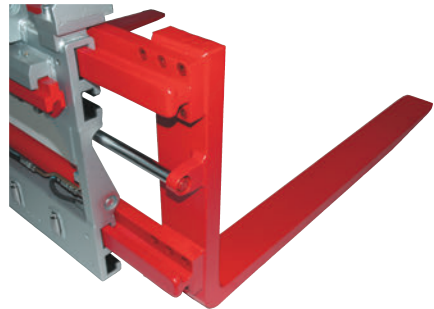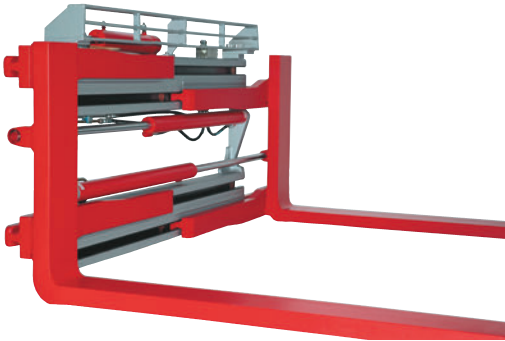

DURWEN
Forklift Attachments

More than 60 years experience