

Sideshifting 360° rotator

DG-S


constant sideshift

The rotator type **DG-S** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust. DG-S is equipped with constant sideshift +/-100 mm.



type	lift truck capacity tons	capacity kg/mm LC	ISO	width B mm	max. torque ΔP 100 bar Nm	centre distance M - M mm	N mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DG 16-S	1,5-1,8	1600/500	II	880	5200	260-660	50	+/- 100	166	80	264
DG 20-S	2,0	2000/500	II	980	5200	260-760	50	+/- 100	166	82	270
DG 25-S	2,5/600	2500/600	II	1100	9400	260-860	50	+/- 100	150	80	330
DG 30-S	3,0	3000/500	III	1150	9400	320-920	50	+/- 100	175	85	394
DG 35-S	3,5	3500/500	III	1150	11700	320-920	50	+/- 100	180	87	409
DG 45-S	4,5-5,0-500	5000/600	III	1350	14000	320-1120	50	+/- 100	193	94	530
DG 50-S	5,0-600	5000/600	IV	1350	14000	310-1010	50	+/- 100	208	110	645
DG 60-S	6,0	6000/600	IV	1500	22000	310-1210	50	+/- 100	225	138	794
DG 80-S	7,0-8,0	8000/600	IV	1750	22000	310-1510	50	+/- 100	230	143	852
DG 100-S	8,0/900	8000/900	IV	1750	26000	310-1510	50	+/- 100	255	165	995

- foundry version see page 97
- includes hoses and couplings
- 2 hydraulic function required
- hook-on forks reinforced for rotator use must be used.
- quick release hooks: (class 2), (class 3), (class 4), upon request

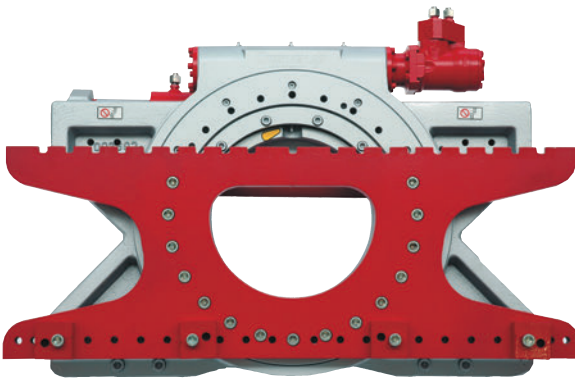

DURWEN Forklift Attachments

More than 60 years experience