
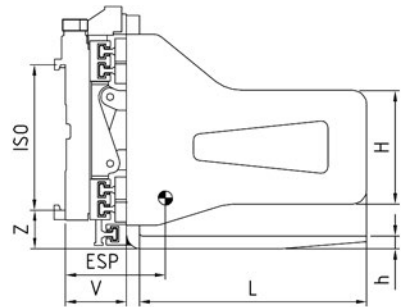


# Container discharger

**DGE**


360° rotation

The rotating container discharger **DGE** rotates 360° and is developed for emptying containers and vessels. The load is picked up with the forks and supported at the sides by the clamping arms. To protect the containers the attachment is equipped as standard with a pressure relief valve and pressure-gauge. Fork positioning is manual. The Durwen direct drive rotator uses a worm wheel system protected against the ingress of dirt and will give a long service life.

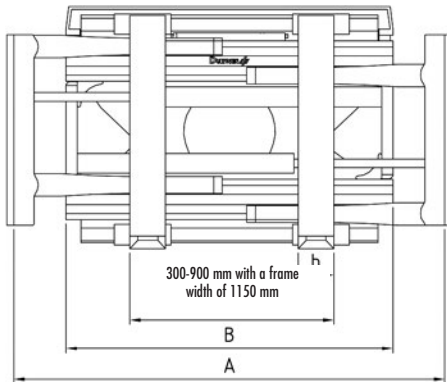

type	lift truck capacity tons	ISO	capacity kg/mm LC	opening range A ITI mm	B mm	forks b x h mm	arms L x H mm	Z mm	V LLC mm	ESP COG mm	weight kg
DGE 20	1,5-2,0	II	1500/500	480-1640 480-1740	1050 1150	100x40	800x400	136	206	265 260	725 740
DGE 25	2,5	II	2000/500	480-1640 480-1740	1050 1150	125x45	800x400	136	212	295 285	830 845
DGE 30	3,0	III	2500/500	480-1740	1150	125x45	800x400	136	212	285	850

- rubber coated arms upon request
- longer arms and forks upon request
- includes hoses and couplings
- 2 hydraulic functions required (3 with sideshift)
- includes pressure relief valve and pressure gauge
- constant sideshift ISO II, ISO III upon request, data upon request

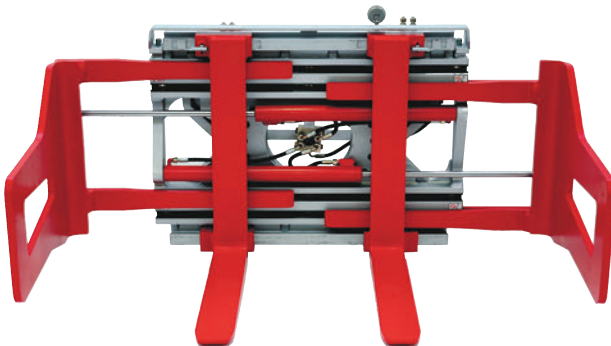

**DURWEN**  
Forklift Attachments

More than 60 years experience